



ENCLOSED
TREATMENTS
for patio doors
®

Flush Frame
Patio Door Unit
25" x 66" and
27" x 66"

Easy to add on. Easy to use.



Las instrucciones en
español comienzan en
la página 7

Les instructions en
français commencent
à la page 13



INSTALLATION/MAINTENANCE INSTRUCTIONS
For flush frame patio doors.

Thank you for your purchase of ODL enclosed treatments for patio doors. Unpack your blind/shade assembly and check for damage. Be sure to remove all foam packaging located around the frame. Also, prior to operating the treatment you will need to remove the red plastic clip located on the back of the frame, below the raise / lower operator.

Be sure you have the correct size for your window by holding the assembly up to the door. Depending on the exact size of your door glass, the patio door treatment unit could overlap several inches onto the door.

It is important to operate the treatment only while it is upright. Be sure to read the entire instruction manual prior to beginning actual installation.

For assistance with enclosed treatment installation or additional product information, call ODL customer service toll free at 1-866-ODL-4YOU (635-4968), or visit our website at www.odl.com.

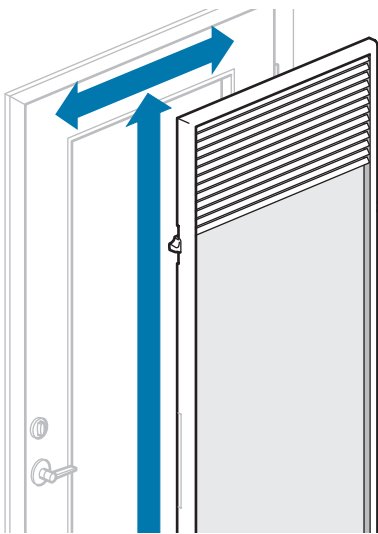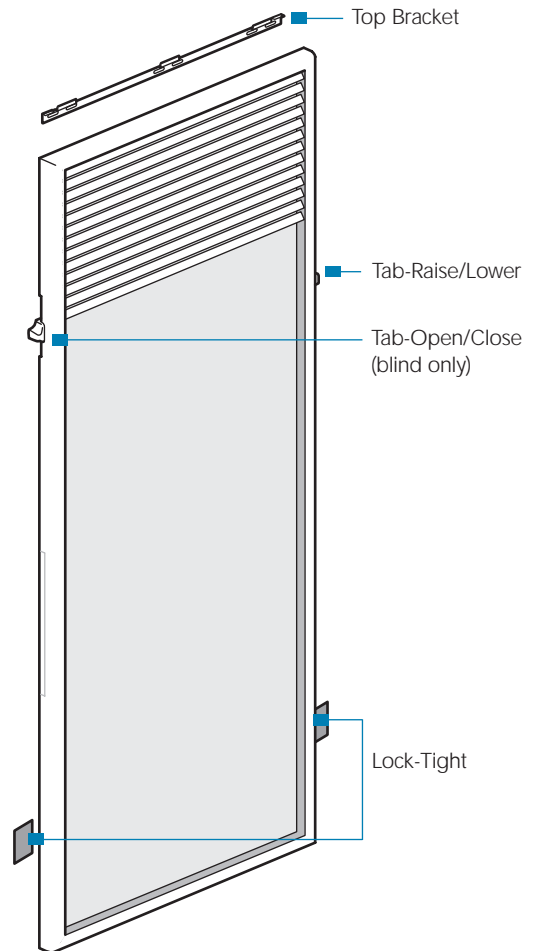

1

DOES IT FIT?


Carefully lift the treatment assembly and place over the window. The frame should fit flush up against your door and cover the entire window. Because the frame is designed to fit patio door glass units of various heights and widths, your unit may extend a couple inches beyond your actual glass.

Set the assembly down, standing it upright.

DOOR HARDWARE INTERFERENCE

If your door hardware is located close to your door glass frame, you could encounter interference with the fit of your Enclosed Treatment Unit. To avoid this interference simply remove the filler strip located on that side of the Enclosed Treatment frame. This will allow the escutcheon plate on your door hardware to slip underneath the Enclosed Treatment frame. If the tabs on the frame (used to hold the filler strip on the frame) are in the way, you can simply clip them off with pliers.

If you have a lever door handle and the handle extends over your door glass there is a slight chance, the Enclosed Treatment unit may not fit. This interference issue is common with lever arm handles and window treatments. In order to make the Enclosed Treatment unit fit you will either have to change your door knob so that it does not extend over the door glass frame, or purchase a lever door handle extender.

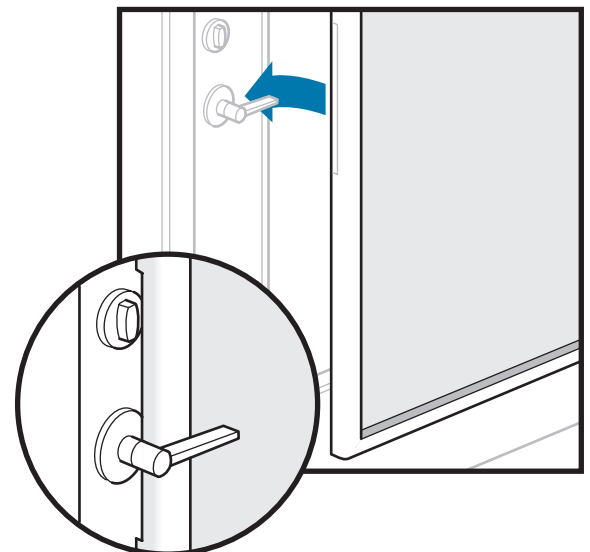



2

LOCATE TOP BRACKET

IMPORTANT: It is important to locate the actual glass line or “witness line” in the patio door. There should be a slight groove or visible line roughly an inch larger than the viewable glass in your door. This is the actual size of your door glass and you must make absolutely sure that you do not drill or screw inside of this line.

Using a tape measure find the center of your door glass and make a mark with a pencil above your glass “witness line”. If your unit is more than 3” taller than your viewable glass, you may want to center the door over-lap top and bottom. Simply hold the unit up in front of glass, center it over your door glass and have a friend make a pencil mark just above the frame.

Take your top bracket and line the center notch in the bottom of the bracket with the center point of your door. Now, line up the top of the hook in the bracket with the pencil mark locating the top of the unit. If you didn't make a mark centering blind unit top and bottom, locate the top bracket just above the door glass witness line.

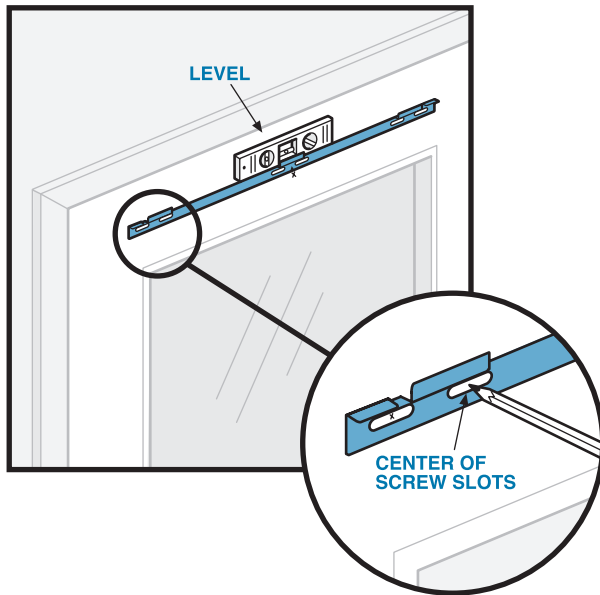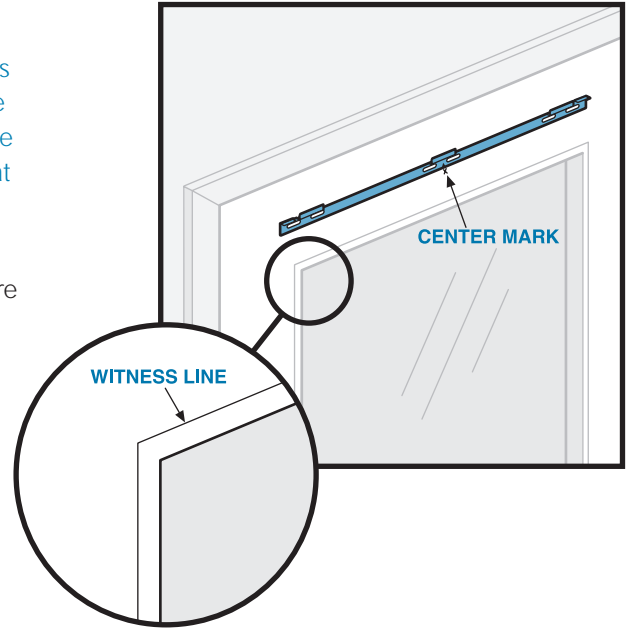

3

MARK HOLE LOCATIONS

While ensuring that the top bracket is level (you can use a level or the “witness line” to make sure bracket is level), and in the position established in Step 2, mark hole locations in center of the six screw slots with a pencil.


IMPORTANT REMINDER: Your hole locations must be located above the door glass “witness line” which is roughly one inch above the visible glass.

4

ATTACH TOP BRACKET TO DOOR



To ensure that the screws install securely into all door surfaces (wood, steel, fiberglass or vinyl) we have included a specific drill bit and screws. Only use the drill bit and screws contained in the treatment hardware pack. If you are missing any parts, contact ODL customer service (866-ODL-4YOU) and a hardware pack will be immediately sent to your home.

Pre-drill holes with provided drill bit and screw top bracket into place using all 6 screws. To avoid stripping screws – Do not use power driver to screw bracket into place. (TIP – For steel doors you may have to create a punch mark to aid in your drilling – to do so use a nail and a hammer to create a slight punch)

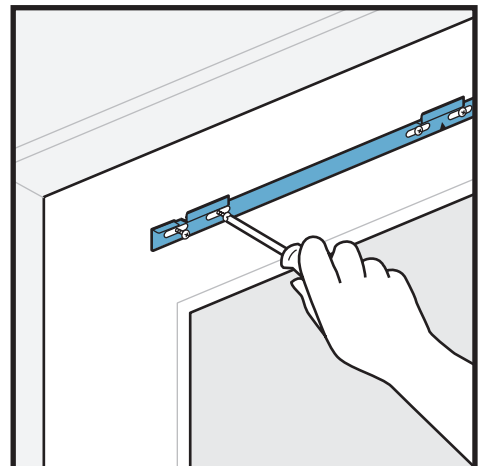

5 CLEAN GLASS

Stand unit upright. Fully raise the blind/shade. Clean the inside of the treatment assembly and the window on the door.

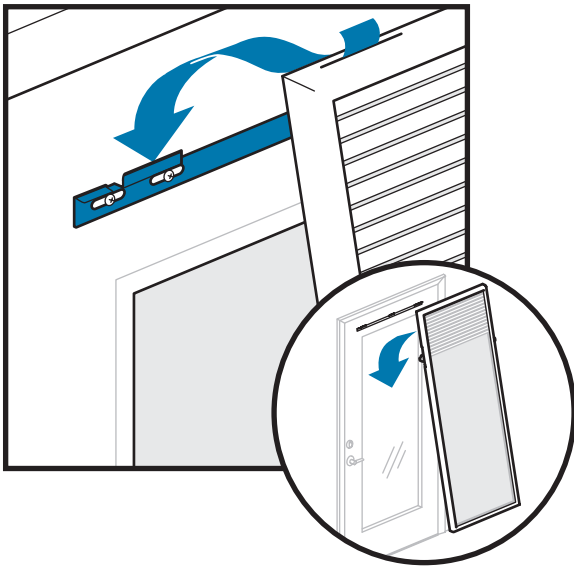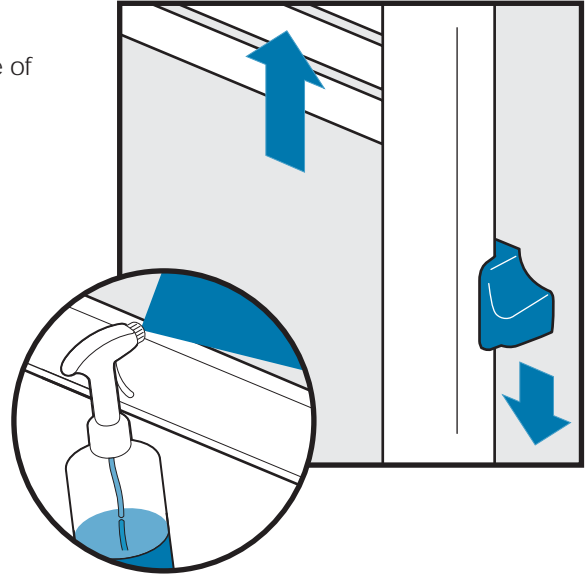

6 HANG UNIT

Carefully lift and securely hang the top of the treatment assembly over the top bracket. Angle the lower unit towards you while you slide it on (if you are sliding unit under a lever handle you will first have to slip the treatment under lever before you hang it). Verify that the three hooks in the bracket are in the slots at the top, inside edge of the frame. Move side to side to verify the unit is square and secure.


7 SECURE LOWER CORNERS TO DOOR

Your unit has two sections of Lock-Tight located in the lower left and right corners. This material is very aggressive and when installed according to these instructions, will hold the unit securely to your door.


First clean your door in the locations where the Lock-Tight will be installed. Use the supplied cleaning wipes to properly remove grease and dirt from the door surface.

Once your door is clean and dry, peel the backing off of both sections of Lock-Tight and press the frame firmly against your door for 1 minute. Do not attempt to remove the unit for at least 20 minutes following initial installation. After 20 minutes the Lock-Tight adhesive will be 90% secure. After 24 hours, it will be 100% secure.

To remove unit refer to the "Maintain" section of this instruction manual.

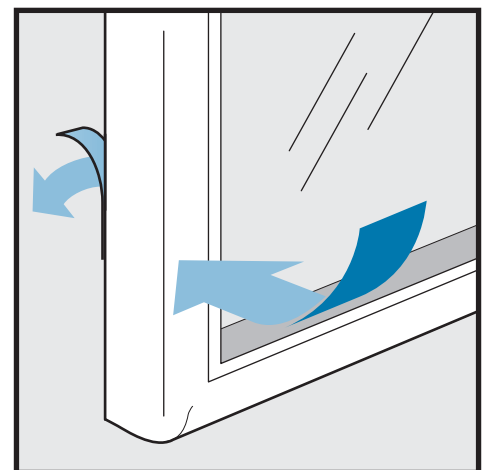


OPERATION

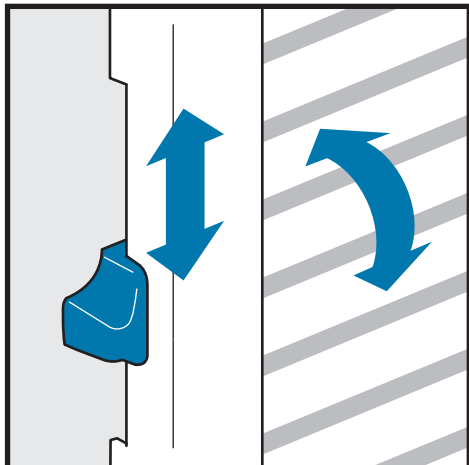

OPEN/CLOSE (blind only)

Slide left hand tab up or down to tilt the blind.

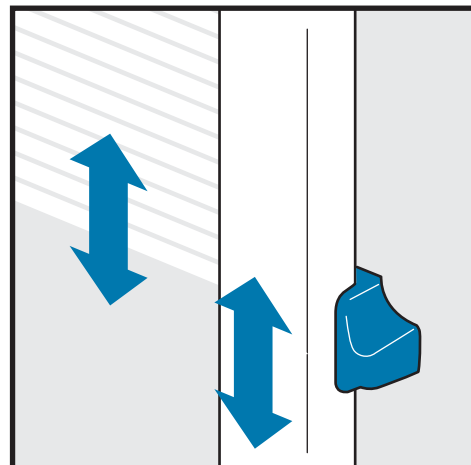


RAISE/LOWER

Slide right hand tab and down to raise and lower the blind/shade.

MAINTAIN

- Frame can be washed with soap and water. Glass can be cleaned with a quality window cleaner.
- Frame can be painted with acrylic latex paint or stained using a “gelled” wood stain or artist oil.
- To remove treatment from door, pull lower corners free from Lock-Tight. Once disengaged, carefully lift the unit off of top bracket.
- To re-install the unit, hang frame according to installation instruction Step 6. Once it is secure on the top bracket, firmly press on lower corners of frame to engage the Lock-Tight.
- For best performance, shade should not be left in raised position for extended periods of time and should be “exercised” - raised and lowered on a regular basis to prolong fabric life.

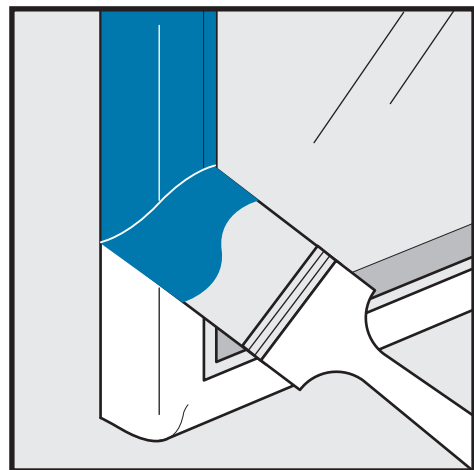

PREVENTING CONDENSATION

Interior condensation is caused by excess humidity in your home. Enclosed Treatments do not cause condensation, but are a good indicator of humidity levels that are too high. Keep in mind that new homes release moisture from construction materials through several heating and cooling sessions. To the right is a quick guide to appropriate humidity levels:

Maximum Recommended Humidity Levels (based on inside home temperature of 70 F)

Outside Temperature F	Inside Humidity
20 F to 40 F	Not over 40 %
10 F to 20 F	Not over 30 %
0 F to 10 F	Not over 25 %
-20 F to 0 F	Not over 20 %
Below -20 F	Not over 15 %

If your door glass has interior condensation, you should be able to control it by reducing the humidity level in your home (for example you could reduce or eliminate humidifiers). You can also help limit the potential for condensation by removing the filler strips located on the sides of your Enclosed Treatment frame (see step 1 for removal instructions). By removing these filler strips you will increase the airflow between the enclosed treatment unit and your door glass.

Condensation does not indicate a defect in an Enclosed Treatment unit and will not damage your Enclosed Treatment unit.

For assistance with enclosed treatment installation or for additional product information, call ODL customer service toll free at 1.866.ODL.4YOU (635-4968), or visit our website at www.odl.com

WARRANTY COVERAGE

Subject to the conditions, exclusions and limitations herein, ODL Incorporated ("ODL") warrants that its Aluminum Blinds and cellular shade for Steel Entry Doors products ("Product") are free from defects in material and workmanship that would render the Product unfit for its normal and recommended use. THIS WARRANTY APPLIES AND EXTENDS ONLY TO THE ORIGINAL CONSUMER PURCHASING THIS PRODUCT. THE DURATION OF THIS WARRANTY BEGINS ON THE DATE OF PURCHASE BY THE CONSUMER AND EXTENDS FOR A PERIOD OF FIVE YEARS.

EXCLUSIONS FROM COVERAGE

This warranty does not cover:

- A Product that is not installed on an entry door.
- Defects or damages resulting in failure to install or operate the Product in accordance with ODL's installation instructions.
- Defects or damages resulting from use of the Product for purposes other than those for which it was designed.
- Defects or damages resulting from modifications or attachments to the Product.
- Glass breakage or other damage to the entry door.
- Defects or damages arising out of improper handling, cleaning, maintenance, operation, defective or improper installation (including installation not in accordance with ODL's installation instructions), improper storage, normal wear and tear, accident, act of God, intentional human acts, misuse, abuses, or any circumstances beyond the control of ODL.
- Defects or damages resulting from shipment by common carriers, private transportation or other means of transportation.

INSPECTION AND DISCOVERY OF DEFECT

It is the Consumer's responsibility to inspect the Product immediately upon receipt of the Product. If a defect covered under this warranty is discovered upon inspection, the customer must follow the Warranty Claim Procedure set forth below.

ODL shall have no obligation under this warranty with respect to any defect reasonably discoverable upon immediate inspection once the product has been installed.

If a defect occurs after installation within the warranty period, then the customer must also follow the Warranty Claim Procedure set forth as follows.

WARRANTY CLAIM PROCEDURE

1. The Consumer must present a written claim to ODL within 30 days after discovering the defect. The Consumer must submit its claim to the following address: ODL Incorporated, Customer Service, 215 East Roosevelt Avenue, Zeeland, Michigan, 49464. ODL must receive this written claim within the warranty period.
2. The Consumer must use reasonable diligence to include all of the following in the written claim:
 - a. An adequate description of the claimed defect(s);
 - b. The type and style of Product;
 - c. Exact Product size;
 - d. The date of the Consumer's purchase, the place of purchase, and the purchase price.
3. The Consumer must, if requested by ODL, permit ODL or its representative to inspect the Product.

REMEDIES

After receiving a valid claim, ODL will, at ODL's option either (a) repair the Product or provide a replacement Product of like kind and design, or (b) upon the return of the Product to ODL, refund the Consumer the purchase price of the Product paid by the Consumer.

If ODL elects to provide a replacement Product, the limited warranty for the replacement product will last for the balance of the warranty of the original Product.

ODL'S LIABILITY UNDER THIS WARRANTY IS LIMITED TO EITHER (A) OR (B) ABOVE, AND ODL WILL IN NO EVENT BE RESPONSIBLE FOR SHIPPING, LABOR, REMOVAL OF ORIGINAL PRODUCT, INSTALLATION OF REPLACEMENT PRODUCT, FINISHING EXPENSES, OR OTHER CHARGES, COSTS OR CLAIMS INCURRED BY THE CONSUMER.

DISCLAIMER OF WARRANTY

NO IMPLIED WARRANTY, INCLUDING A WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE, SHALL APPLY TO THE PRODUCT (OR ANY REPLACEMENT) BEYOND THE DURATION OF THIS WRITTEN WARRANTY. (Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.)

LIMITATIONS OF REMEDIES

THE REMEDIES SET FORTH ABOVE ARE THE CONSUMER'S EXCLUSIVE REMEDIES FOR BREACH OF WARRANTY OR NEGLIGENCE. IN NO CASE SHALL ODL BE LIABLE TO THE CONSUMER OR AN OTHER PERSON FOR ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES. (Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.)

Unless modified in a later writing signed by both ODL and Consumer, this warranty is the complete and exclusive warranty related to the Product, and it supersedes all earlier agreements and other communications relating to the Product. No employee of ODL or any other party is authorized to make any warranty in addition to this warranty. Invalidation of any one or more of the provisions of this warranty shall not invalidate or affect one of the other provisions. This warranty is not transferable.

This warranty gives the Consumer specific legal rights, and the Consumer may also have other legal rights which may vary from state to state.